


•430, 530 SERIES•

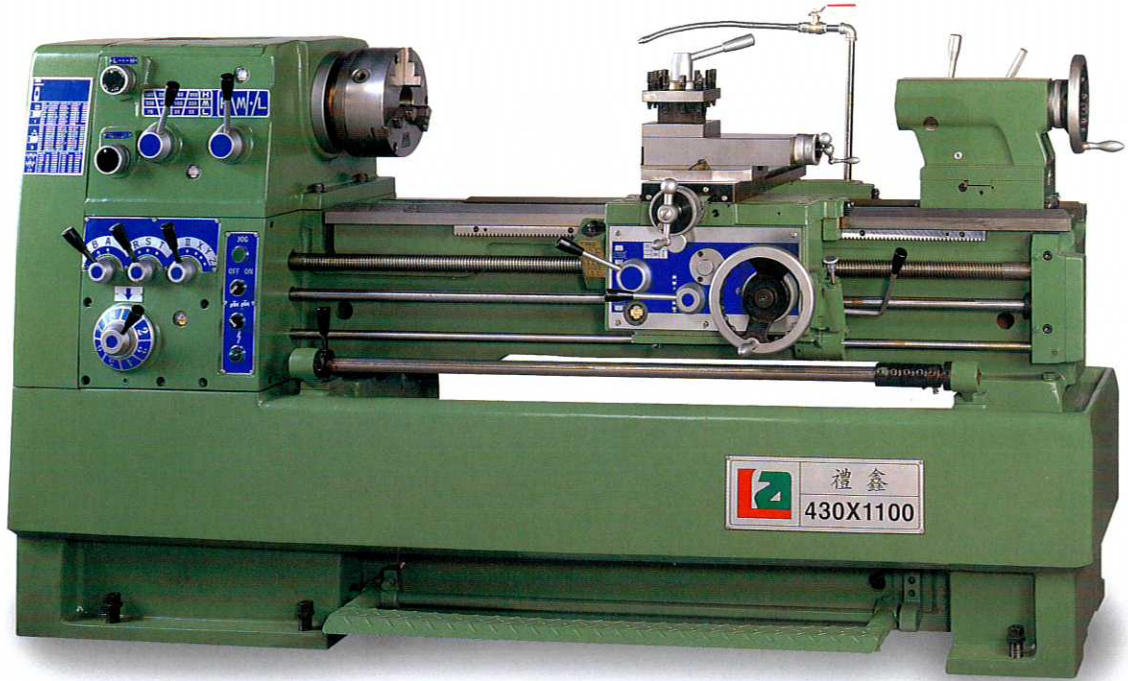

規格 SPECIFICATIONS

項目 ITEM	機型 MODEL	LA-430				LA-530			
		550	800	1100	1700	550	800	1100	1700
功能 CAPACITY	床面寬度	300 (12")							
	車刀臺最大移動距離	120 (4 3/4")							
	床面上最大工作物直徑	432 (17")				532 (21")			
	鞍面上最大工作物直徑	272 (10 3/4")				372 (14 2/3")			
	間隙上最大工作物直徑	610 (24")				710 (28")			
	從面板算起之間隙長度	150 (5 7/8")							
	床腳下面至中心線高度	1080 (42 3/8")				1080 (46")			
主軸箱 HEADSTOCK	兩心間最大距離	800 (32")		1100 (44")		1700 (67")			
	主軸速度變換數	12							
	主軸孔徑	58(2 1/4")							
	主軸鼻端	ASA-A1-6 D1-6							
	主軸孔及中心針之斜度	MT. No. 6 x No. 4							
	主軸迴轉數	35, 52, 75, 110, 160, 230, 330, 490, 650, 950, 1350, 2000							
螺紋和進給 THREAD & FEED	導蝨桿之直徑及螺距	35(1 1/8")，螺距4牙/吋或6mm/牙 /35(1 1/8")*4TPI or pitch 6mm							
	英制	2-72 (44種) /2~72(44)changes							
	公制	0.2*14(39種) /0.2~14(39)changes							
	押送量變換數	36							
	押送範圍：縱	0.03*0.85(0.0012"~0.034")							
尾座 TAILSTOCK	橫	縱押送之1/2/1/2 of longitudinal feeds							
	心軸直徑	60(2 3/8")							
	尾座心軸行程	150(6")							
	中心孔斜度	No. 4							
馬達 MOTORS	主軸馬達	5 HP或(7 1/2HP特別附屬品)5 HP or (7 1/2HP optional)							
	冷卻泵浦	1/8							
機械體積及重量 MACHINE DIMENSIONS AND WEIGHT	佔用空間	1650x1000	2000x1000	2300x1000	2900x1000	1650x1000	2000x1000	2300x1000	2900x1000
	(長×寬×高)	x1400	x1400	x1400	x1400	x1400	x1400	x1400	x1400
	裝箱尺寸	1750x1000	2000x1060	2300x1060	2900x1060	1750x1000	2000x1060	2300x1060	2900x1060
	(長×寬×高)	x1500	x1500	x1500	x1500	x1500	x1500	x1500	x1500
淨重(約)	1300	1500	1600	1800	1500	1600	1700	1900	

★規格若有更改，恕不另行通知 The above specifications subject to change without prior notice.