


•560, 660, 760 SERIES•

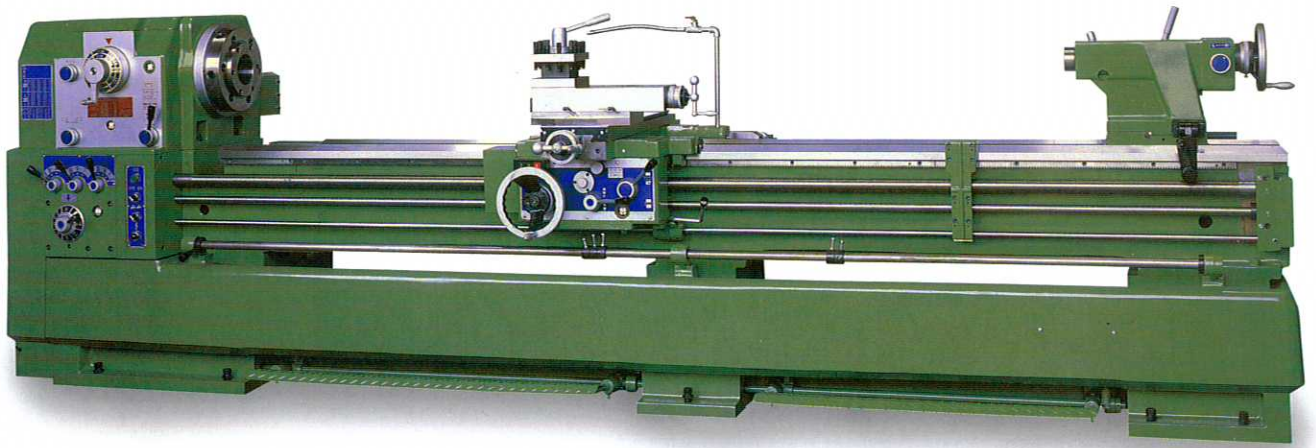

規格 SPECIFICATIONS

項目 ITEM		機型 MODEL	LA-560	LA-660	LA-760
			1500 • 2000 • 2500 • 3000 • 4000 • 5000 • 6000	1500 • 2000 • 2500 • 3000 • 4000 • 5000 • 6000	1500 • 2000 • 2500 • 3000 • 4000 • 5000 • 6000
功能 CAPACITY	床面寬度	Width of bed	400 (15 3/4")		
	單刀臺最大移動距離	Total travel of top slide	190 (7 1/2")		
	床面上最大工作物直徑	Swing over bed	560 (22")	660 (26")	760 (30")
	鞍面上最大工作物直徑	Swing over cross slide	330 (13")	445 (17 1/2")	560 (22")
	間隙上最大工作物直徑	Swing in gap	785 (30 7/8")	900 (35 7/16")	1015 (39 7/8")
	從面板算起之間隙長度	Gap width in front of face plate	270 (10 5/8")		
	床腳下面至中心線高度	Height of center from leg bottom	1067.5 (42")	1125 (44 5/16")	1182.5 (46 1/2")
	兩心間最大距離	Distance between centers	1500 (59")	2000 (78 3/4")	2500 (98 1/2")
主軸箱 HEADSTOCK	主軸速度變換數	Number of spindle speeds	段 / steps 12		
	主軸孔徑	Spindle bore	86 (3 3/8"), *104(4 1/16")		
	主軸鼻端	Type of spindle nose	ASA-A1-8 (D1-8), *ASA-A1-11 (D1-11)		
	主軸孔及中心針之斜度	Taper of spindle bore & center	M.T. No. 7 x No. 5		
	主軸迴轉數	Range of spindle speeds	R.P.M. 13,20,30,47,70,105,150,230,340,530,800,1200*(8-800)		
螺紋和進給 THREAD & FEED	導蝨桿之直徑及螺距	Lead screw diameter and pitch	45(1 3/4") • 螺距4牙/吋或6mm,*2PTI /45(1 3/4") • 4TPI or pitch 6mm,*2TPI		
	英制	Range of inch threads	4PTI:2-72 (44種/change), 2PTI:1-36(44種/change)		
	公制	Range of metric threads	6MM:0.2~14 (39種/change)		
	押送量變換數	Nubmer feeds	段 / steps 36		
	押送範圍：縱	Range of longitudinal feeds	mm INCH:0.035~0.98(0.0014"~0.039"),METRIC:0.037~1.04(0.0014"~0.041")		
尾座 TAILSTOCK	橫	Range of cross feeds	mm 縱押送之1/2 1/2 of longitudinal feeds		
	心軸直徑	Tailstock quill diameter	75 (2 15/16")		
	尾座心軸行程	Total travel of tailstock quill	178(7") (MT*5)		
	中心孔斜度	Taper in tailstock quill	M.T.No. 5		
馬達 MOTORS	主軸馬達	Spindle drive motor	HP 10HP/4P		
	冷卻泵浦	Coolant pump motor	HP 1/8		

★規格若有更改，恕不另行通知 The above speciations subject to change without prior notice.