

---

## PHH-50

- **Injection Molding Press.**
- 50 tons capacity.
- Plates dimensions: 800 x 1000 mm, 4 track slide guidance front plate.
- 1000 mm opening between plates.
- 750 mm upper plate slide.
- Two-speed hydraulic power pack, slow / fast selector.
- Photo-electric safety guards CAT 4, front side protection.
- Machine weight: 3.350 Kg / 3.5 tons.



---

## PHH150 5446

### Features

Power (tons)	150
Stroke (mm)	400
Lower plate (mm)	1500x500
Upper plate (mm)	450x400
Throat depth (mm)	265
Maximum opening (mm)	700
Engine power (HP)	5,5
Approximation speed (mm/s)	10
Working speed (mm/s)	2,4
Max. pressure (Bar)	300
Height (mm.)	1650
Width (mm.)	2910
Depth (mm.)	1500
Weight (Kg.)	5700



---

## PHH180 3988

- Power of the machine 180 Tons.
- Lower plate 3.000 x 600 mm with "T" grooves M16.
- Upper plate 600 x 300 mm with "T" grooves M16.
- Upper plate guided by means of 2 cylindrical columns Ø40 with bronze sleeves.
- Maximum opening between plates: 850 mm.
- Stroke of the cylinder: 400 mm.
- Hydraulic group with 2 speeds, approximation and work with automatic speed change by pressure or position.
- Approximation speed: 10 mm/sec.
- Work speed: 3 mm/sec.
- Engine power 7,5 Hp (5,5 Kw).
- Pressure regulator.
- Activation of the machine by means of manual distributor with 3 positions.




---

## PHH200 4924

### Features

Power (tons)	200
Stroke (mm)	400
Lower plate (mm)	1800x500
Upper plate (mm)	450x400
Maximum opening (mm)	800
Engine power (HP)	5,5
Approximation speed (mm/s)	10
Working speed (mm/s)	2,4
Max. pressure (Bar)	315
Machine dimensions (m)	2,90x1,80x1,55
Weight (Kg.)	7000

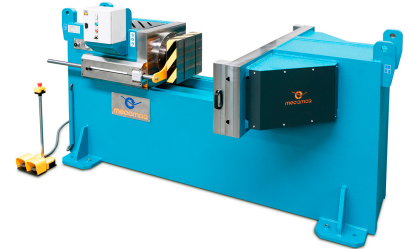

---

## PHH250 4273

### Features

Power (tons)	250
Stroke (mm)	500
Lower plate (mm)	2500x500
Upper plate (mm)	400x300
Maximum opening (mm)	900
Engine power (HP)	7,5
Pressing speed (mm/s)	600 / 140
Machine dimensions (m)	2,94x2,50
Weight (Kg.)	8500



---

## PHH250 4450

### Features

Power (tons)	250
Stroke (mm)	500
Lower plate (mm)	1800x500
Upper plate (mm)	400x400
Maximum opening (mm)	1000
Engine power (HP)	7,5
Approximation speed (mm/s)	10
Working speed (mm/s)	2,3
Max. pressure (Bar)	315
Machine dimensions (m)	1,80x3,30x1,55
Weight (Kg.)	9000



---

## PHH-250

- Press for straightening sections
- 250 Tn power
- 1.800 x 500 mm support bench
- 600 mm opening between benches
- 250 mm cylinder course
- Course control via end of track
- 7,5 Hp engine power
- Weight: 8.000 Kg approx



---

## PHH-300

- The press Mecamaq type PHH-300, It has been designed specially for the suitable one or shaped of profiles for companies of structures.
- It has a power of 300 Tm, with 1 cylinder of double effect, with course of 300 mm adjustably both of ends of stops and in pressure.
- The desk is of 2.000 x 700 mm with grooves "T".
- Hydraulic group of 2 speeds 600/115 mm x minute.
- Power of the engine: 7,5 Hp.
- Operation in manual and automatic.

