


MECAMAQ HYDRAULIC PRESSES

PHH series



PHH-200 ▲

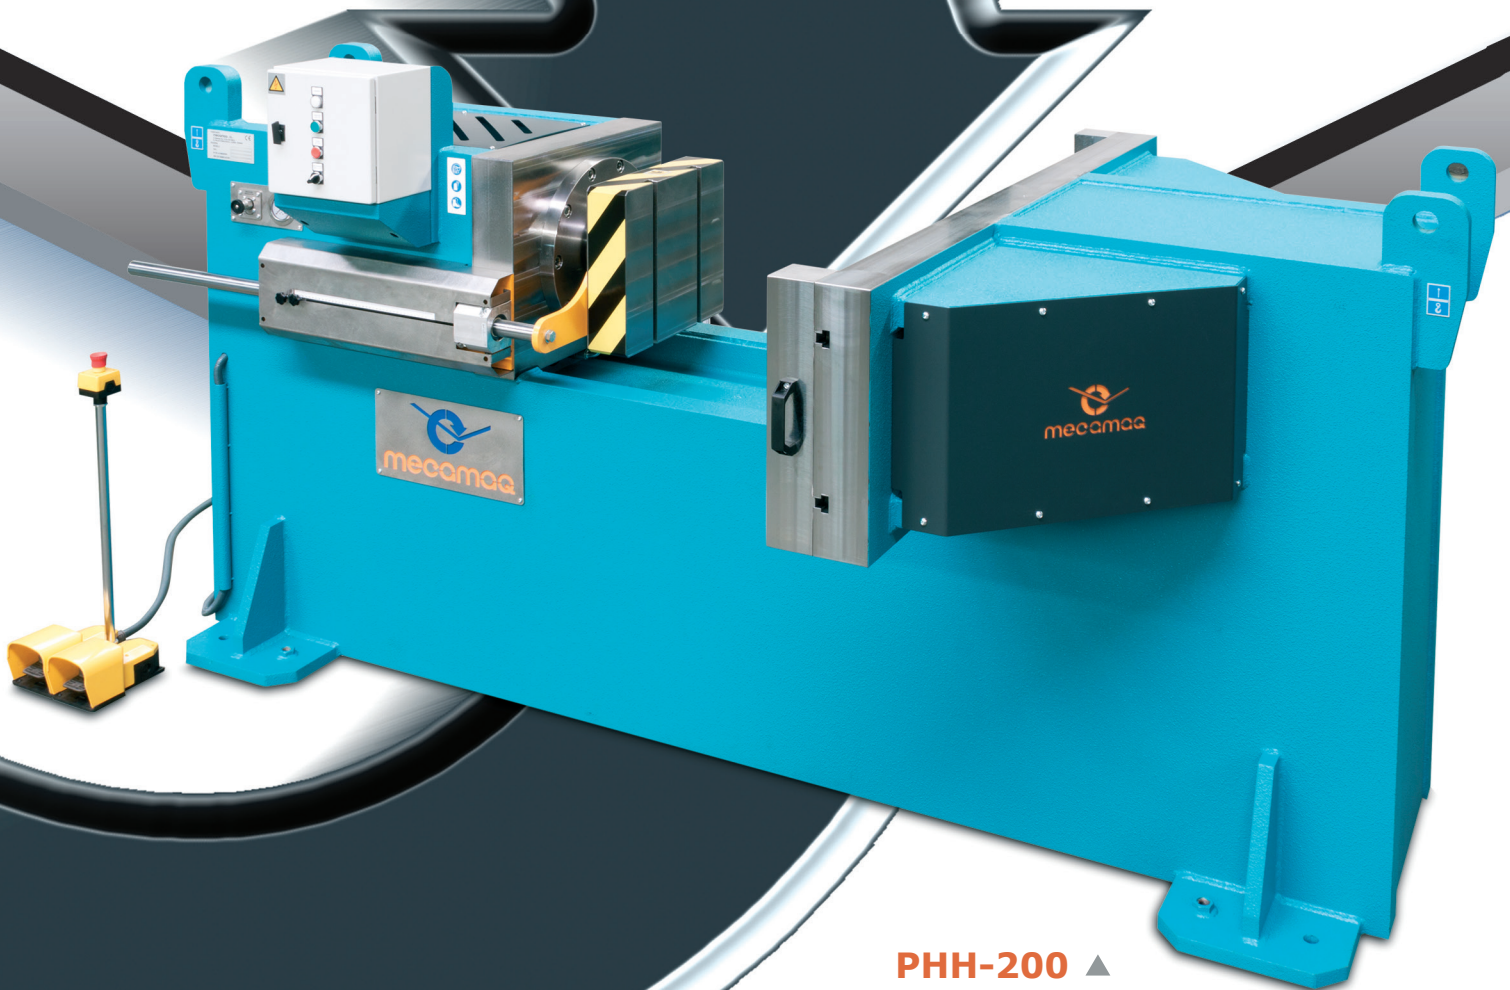

mecamaq
HYDRAULIC PRESSES




mecamaq

Designed for straightening
beams and structural profiles



PLC control with
tactile panel

Special tools and
anti-spin system

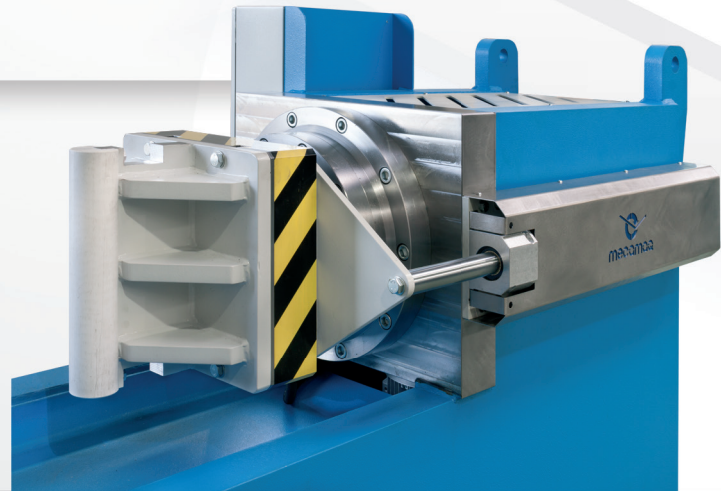

Hydraulic unit assembled
inside of press frame



Adjustable height
roller supports



Features

- ☑ Monoblock frame manufactured with structural steel 5355 (simulated with finite element analysis software).
- ☑ T-Slots "M16" "DIN 650".
- ☑ 2 speeds with automatic change of fast speed by pressure.
- ☑ Limit switches.
- ☑ Pressure regulator.
- ☑ Electric selector (MANUAL-AUTOMATIC RETURN)
- ☑ Activation by means of electric pedals.

Series Specifications

PHH Series	PHH-150	PHH-200	PHH-250	PHH-300	PHH-400
Power (Tm)	150	200	250	300	400
Stroke (mm)	400	400	400	400	400
Fixed plate (mm)	1500x500	1800x500	2000x550	2000x600	2200x650
Movable plate (mm)	450x400	450x400	500x400	550x450	600x500
Max. opening	700	800	900	1000	1000
Motor power (HP)	5,5	5,5	7,5	10	12,5
Approximation speed (mm/s)	10	10	10	10	10
Work speed (mm/s)	2	2,4	2,5	2,6	2,5
Max. pressure (Bar)	300	315	310	315	315

Optional Equipment

- ☑ PLC Control with tactile panel.
- ☑ Adjustable height roller track.
- ☑ Customized dimensions.
- ☑ More optional equipment under request.




PHH-250 ▶

- 250Tm.
- Fixed plate 2500x500mm.
- Opening 900mm.
- Stroke 400mm.
- Motorized roller track



PHH-150 ▶

- 150Tm.
- Fixed plate 1500x500mm.
- Opening 700mm.
- Stroke 400mm.
- Adjustable height roller supports

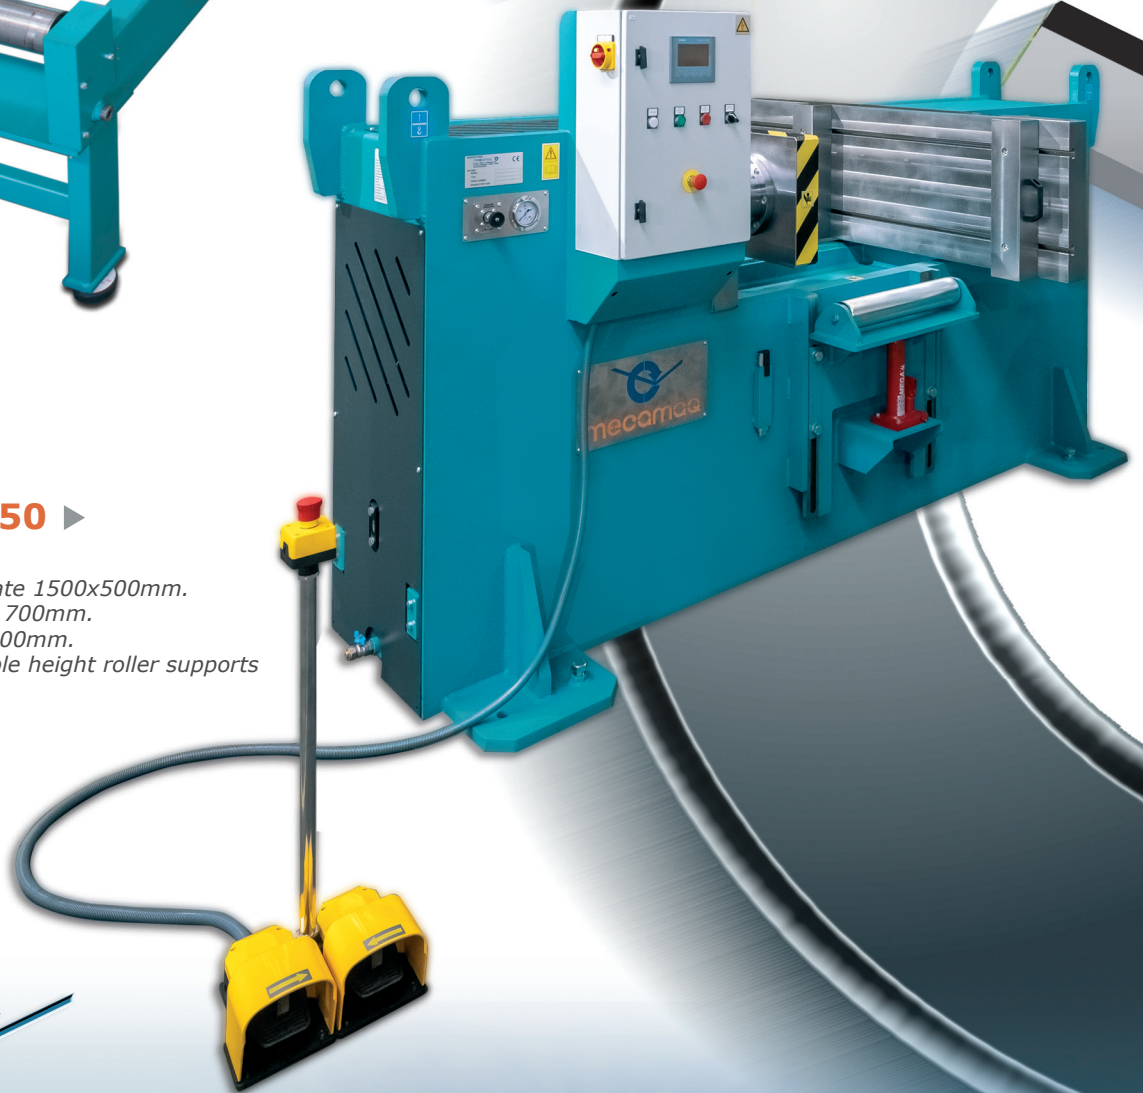

mecamaq
HYDRAULIC PRESSES

Autovía NII, salida 487-484
Pol. Ind. SAU-3
C/ Bassots, Parcela nº10
25243 El Palau d'Anglesola (Lleida)
SPAIN

Tel. (+34) 973 71 12 81
mecamaq@mecamaq.com
www.mecamaq.com

